

## Expando<sup>®</sup> B150




## **Product Highlights**

- Operating temperature from -55°C to +150°C (-67°F to +302°F)
- Low toxicity and smoke generation
- Highly expandable design for bundling of wire harnesses over short and long lengths
- Stable construction once expanded
- Time reduction over standard tying methods
- Low profile solution
- EN 45545-2
- Allows visualization of color coding of cables underneath
- Does not trap heat or humidity
- Rot-free

Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)



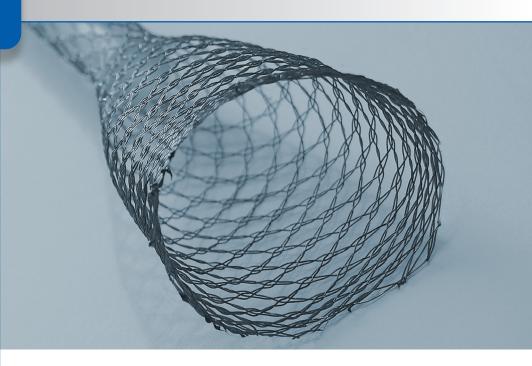

**Expando**® **B150** is a highly expandable sleeve designed for bundling of wire harnesses. Rated to +150°C (+302°F), Expando® B150 meets the standard of the railway industry in terms of flammability.

The design of Expando B150 allows the product to remain stable once expanded and its outstanding expansion range allows it to cover wire harness definitions from 5 to 55 mm with only 3 sizes. A special tool has been designed in 2 choices of lengths to speed-up installation over small and long lengths.

The inherent properties of the raw materials used give Expando B150 low levels of flammability, toxicity and smoke generation.

Expando B150 is used in the railway industry for its outstanding properties in extreme environments and its quick installation compared to standard tying methods. Expando B150 should be considered for railway applications.



ISO 9001:2015 / AS9100D

