


## Product Highlights

- Operating temperature:  
-54°C to +260°C  
(-65°F to +500°F)
- Fire protection up to  
+1100°C (+2012°F) (15 min)  
+ 800°C (+1472°F) (30 min)
- AS1072 Type 2  
(Aero Grade)
- Fluid resistant to hydraulic  
fluids and lubricating oil
- Standard color is red iron  
oxide; other colors include  
black, blue, and aluminum

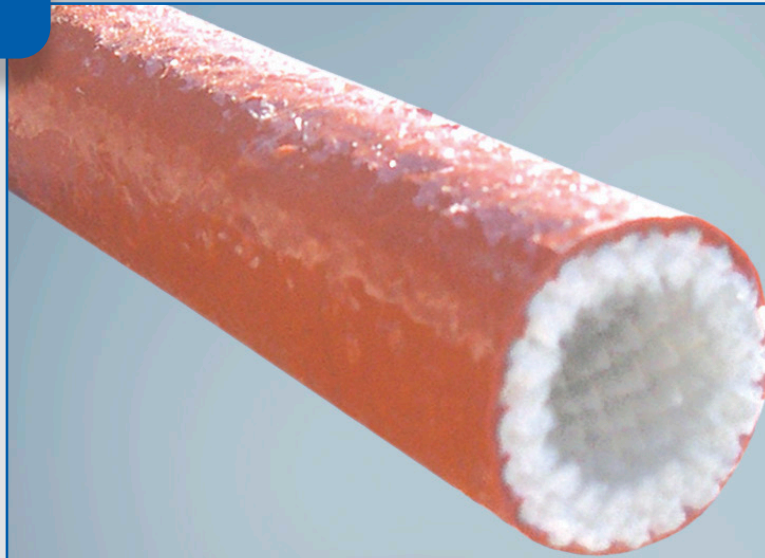

**FyreJacket® Aerospace** is a thickwall braided fiberglass sleeving coated with specially compounded silicone rubber. FyreJacket is intended to slide on easily over a variety of hoses and expand readily to go over fittings and couplings. The specially formulated silicone rubber coating has excellent shedding properties.

FyreJacket is used to protect hoses and hose assemblies, tubing, piping, and cables from exposure up to +260°C (+500°F) and from molten splash and welding sparks. Aerospace grade FyreJacket will withstand short term flame exposure to +1093°C (+2000°F) when installed on a hose assembly qualified to SAE Aerospace Standard 1055\*. Aerospace FyreJacket is packaged in random lengths, with minimum lengths no shorter than 15 feet.

Our manufacturing sites are  
certified ISO 9001, IATF 16949,  
or AS/EN 9100, ISO 14001  
and ISO 45001 (Selected Sites)



Office: 866-956-8323

Email: [contact@titanelectronics.com](mailto:contact@titanelectronics.com)

Website: [www.titanelectronics.com](http://www.titanelectronics.com)

ISO 9001:2015 / AS9100D