


## Product Highlights

- Operating temperature up to +200°C (+392°F)
- Excellent radiant heat protection
- Adhesive backed for peel and stick applications
- Easy installation for complex geometries
- Available in custom designs
- Fluid and chemical resistant

## Typical Applications

- Engine Covers
- Clips and Connectors
- Fuel and Brake Lines
- Other Plastic or Metal Components

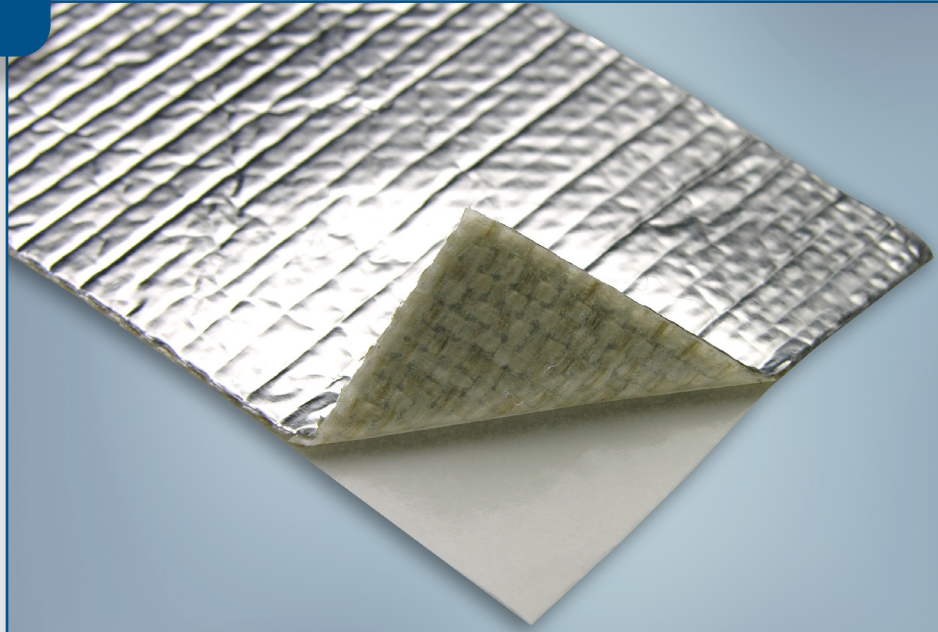

**ReflectShield® 1435** is a woven fiberglass fabric with aluminum foil laminated to its outer surface and a pressure sensitive adhesive to its inner surface. This peel and stick laminate provides superior radiant heat protection for a variety of components including areas of complex geometry or difficult fixation.

Utilizing an acrylic based adhesive system, ReflectShield 1435 provides excellent adhesion for a variety of substrates while maintaining performance during heat ageing and fluid exposure.

ReflectShield 1435 can be slit and sheeted to custom size or 2D die cut to accommodate complex shapes as well as is available with a variety of different backer paper materials and configuration options including tape tabs, cracked liner or kiss cut.



Our manufacturing sites are  
certified ISO 9001, IATF 16949,  
or AS/EN 9100, ISO 14001  
and ISO 45001 (Selected Sites)

# Performance Data – ReflectShield® 1435

Property	Test Method	Result
Temperature Rating	240 hours at +225°C (+200°C rating)	Pass +250°C (+392°F)
Thermal Endurance	25mm above 537°C heat source for 6 hours	No degradation or delamination
Low Temperature Flexibility	SAE J2192	Pass -40°C (-40°F)
Flammability	SAE J369	Self-extinguishing
	FMVSS 302	Pass
Fluid Resistance	SAE J2192	Pass

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

## Construction and Typical Product Characteristics


Outer Layer	Aluminum
Inner Layer	Fiberglass multifilament with a pressure sensitive adhesive (PSA) backing

## Availability

This product is designed to customer specific application, geometry and performance requirements.

Due to the nature of this custom product, please consult your local sales representative for more details.

Typical Thermal Effectiveness (SAE J2302)

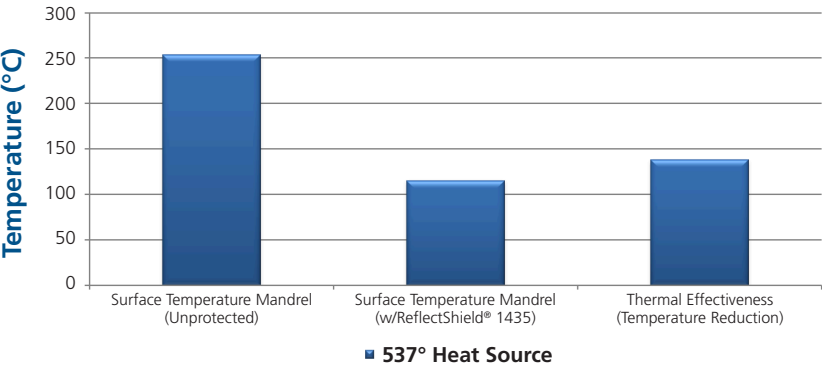

Note: Mandrel is parallel to and 25mm (1") away from heat source



Office: 866-956-8323  
Email: [contact@titanelectronics.com](mailto:contact@titanelectronics.com)  
Website: [www.titanelectronics.com](http://www.titanelectronics.com)  
ISO 9001:2015 / AS9100D

