


Product Highlights

- Operating Temperature
-50°C to +150°C
(-58°F to +302°F)
- Self-wrapping design
- Flame resistant
- EN 45545-2
- ASTM E-162
ASTM E-662
BSS 7239
SMP 800-C
- Zero halogen
- Abrasion resistant
- Easy to apply and remove

Installation Features

- Ideal for bundling without disconnecting components
- Accommodate break-outs
- Multifilament construction soft to the cables

Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

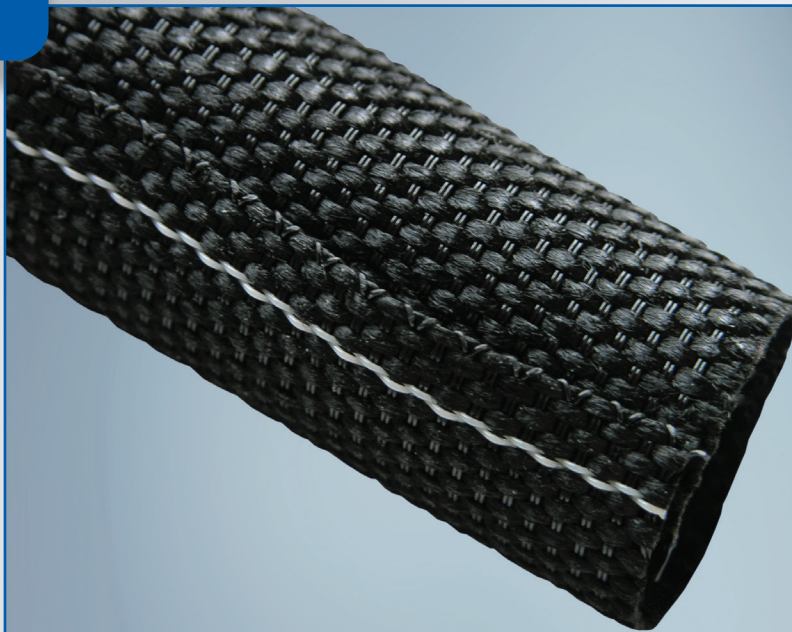

ROUNDIT® 2000FR is a wrap-around sleeving manufactured from flame-retardant polyester monofilaments and multifilaments, designed for mechanical protection and maintenance of wire and cable bundles. Its construction with 100% covering ratio provides good abrasion resistance.

The self-wrapping feature of ROUNDIT 2000FR allows for quick and easy installation and removal of the product for assembly and maintenance.

ROUNDIT 2000FR may be applied and removed without any manipulation of connectors or fittings and offers an innovative solution in areas where breakouts are necessary.

ROUNDIT 2000FR has many applications in the marine, railway and electronic industries.



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.