




ABRASION/MECHANICAL

ROUNDIT® 2000 MA

Product Highlights

- Operating temperature from -65°C to +200°C (-85°F to +392°F)
- ABS2413
- FAR Part 25
- Halogen-free
- Self-wrapping design
- Easy to apply and remove
- Ideal for reworking components without disconnecting them
- Tough fabric texture
- Oil and water repellent

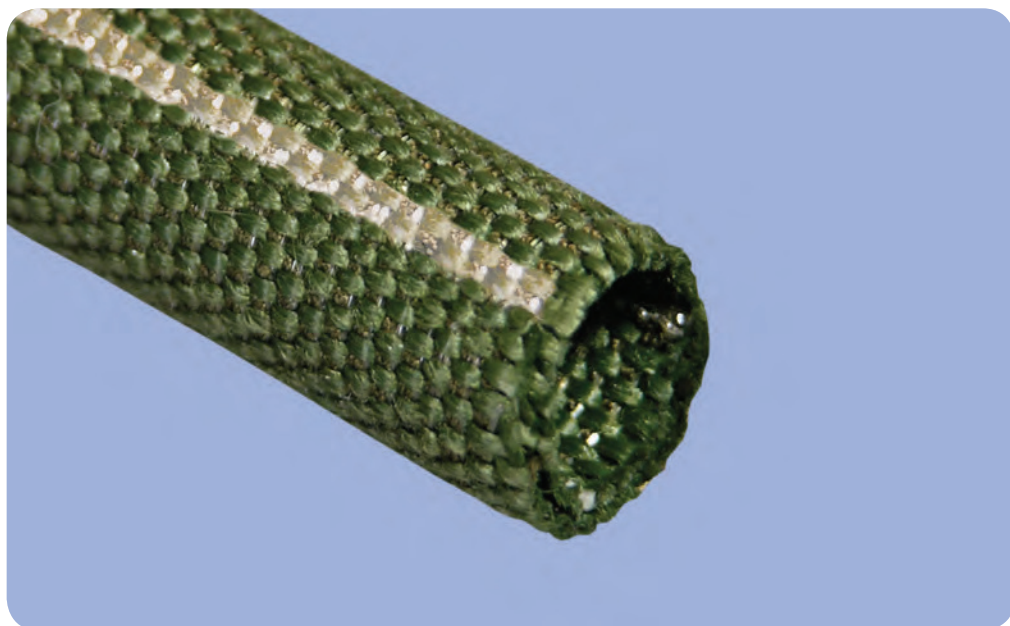

ROUNDIT® 2000 MA is a woven combination of meta-aramid and PPS (polyphenylene sulfide). The meta-aramid/PPS blend in a flat weave construction gives ROUNDIT 2000 MA a rugged yet smooth texture and appearance for high temperature bundling and abrasion resistance. This product is rated to +200°C (+392°F) and is non-halogenated.

ROUNDIT 2000 MA is ideal for commercial aircraft applications due to its excellent abrasion resistance and halogen-free qualities.

ROUNDIT® products are tough, lightweight oversleeves used to bundle and protect cable assemblies, hoses and wire harnesses from chafing, cutting and abrading. The self-wrapping feature of ROUNDIT products allows for quick and easy application and removal of the product for assembly and maintenance. The product may also be applied or removed without disturbing connectors or fittings.



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.



Our manufacturing sites are certified ISO 9001, ISO/TS 16949, or AS/EN 9100, and ISO 14001

RI2000MA_10142015

Titan
ELECTRONICS

Office: 866-956-8323
sales@titanelectronics.com
www.titanelectronics.com
ISO9001:2008 / AS9100 REV. C

BentleyHarris®
Protection Products

FEDERAL
MOGUL
Systems Protection