


Product Highlights

- Operating temperature from -60°C to +200°C (-76°F to +392°F)
- ASD EN 6049-006
- Excellent cut-through and abrasion resistance
- Self-wrapping design
- Ideal for reworking components without disconnecting them
- Lightweight construction
- Tracer indicating the maximum operating diameter
- Aesthetic solution
- Water repellent

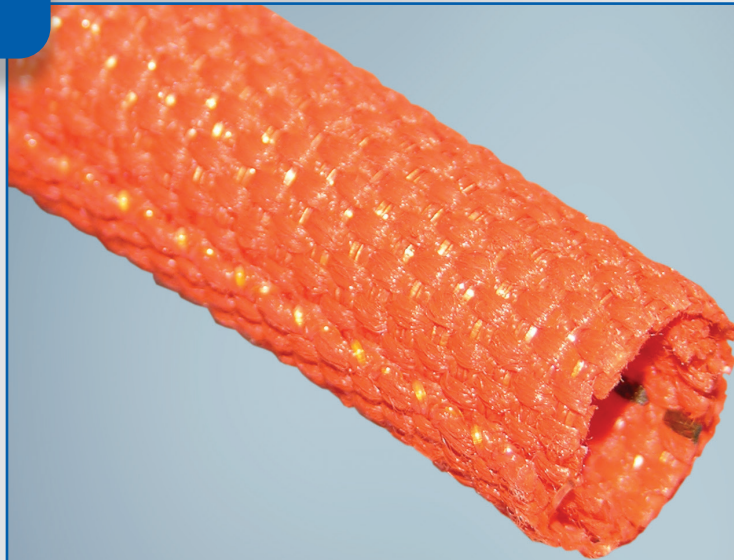

ROUNDIT® 2000 NX Orange is a self-wrapping sleeve manufactured from PPS monofilaments and Nomex® with a water repellent treatment, designed for mechanical protection and maintenance of wire and cable bundles. Its construction with 100% covering ratio provides excellent cut-through and abrasion resistance.

ROUNDIT 2000 NX in orange is designed to identify wire harnesses connected with test equipment taken on-board airplanes.

The self-wrapping feature allows for quick and easy installation and removal of the product for assembly and maintenance. ROUNDIT 2000 NX Orange also accommodates breakouts.

ROUNDIT 2000 NX has many applications in the aeronautical and military industries.

Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.