


Product Highlights

- Operating temperature up to +200°C (+392°F)
- High temperature bundling product
- Mechanical abrasion protection
- Lightweight woven structure
- Self-wrapping tubular design

Typical Applications

- Engine compartment harnesses
- Cables and hoses

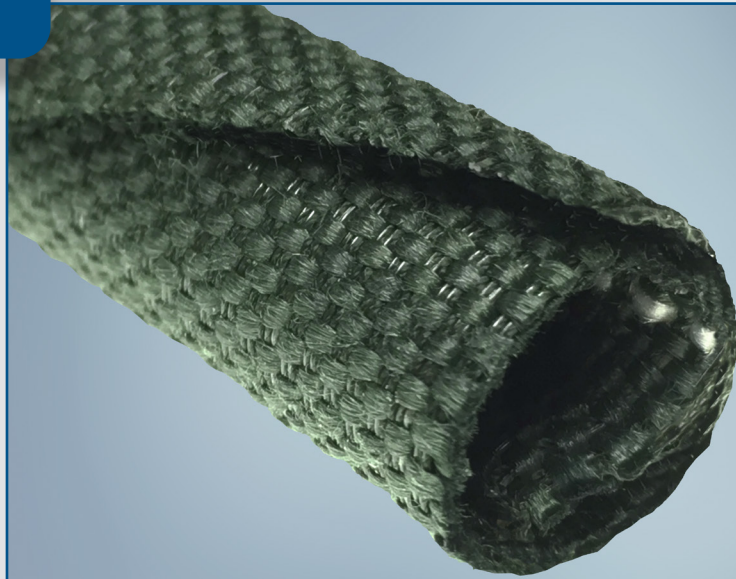

TwistTube® 2440 is a high temperature, lightweight sleeve designed to provide a combination of thermal and mechanical protection. It incorporates a unique self-wrapping closure that allows for quick and easy installation. It also allows for breakouts and can be installed over completed assemblies. The overwrapping design of the product allows it to maintain a circular profile when flexed.

TwistTube 2440 is woven with a blend of aramid multifilament and PPS (polyphenylene sulfide) monofilament. The combination of these two fibers allows the TwistTube 2440 product to have a continuous temperature rating of +200°C (+392°F).



Our manufacturing sites are
certified ISO 9001, IATF 16949,
or AS/EN 9100, ISO 14001
and ISO 45001 (Selected Sites)