


Product Highlights

- Operating temperature from -70°C to +125°C (-94°F to +257°F)
- UL recognized component*
- Self-wrapping design
- Easy to apply and remove
- Ideal for reworking components without disconnecting them
- Tough fabric texture

* UL certificate is supplied for North American version only.

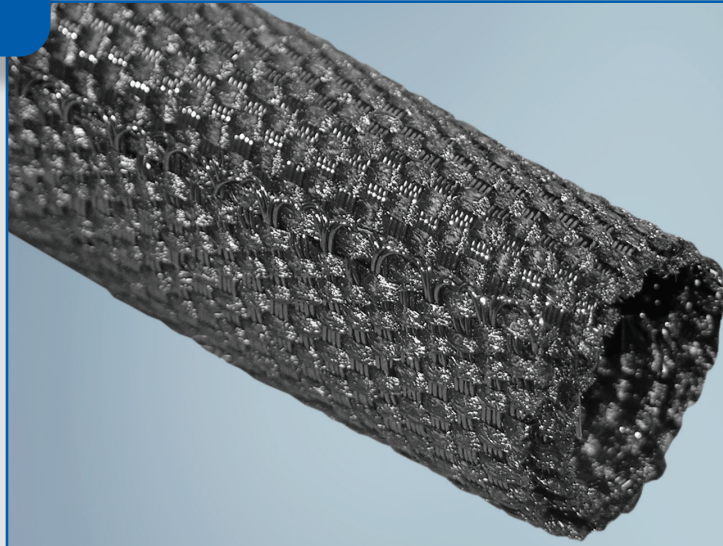

ROUNDIT® 2000 is a woven blend of polyester monofilaments and multifilaments. The monofilament/multifilament blend in a flat weave construction gives ROUNDIT 2000 a rugged yet smooth texture and appearance. This product is rated to +125°C. Roundit has many applications in the aeronautical, marine, electronic, furniture accessory and general manufacturing industries.

ROUNDIT products are tough, lightweight oversleeves used to bundle and protect cable assemblies, hoses and wire harnesses from chafing, cutting and abrading. The self-wrapping feature of ROUNDIT products allows for quick and easy application and removal of the product for assembly and maintenance. Also, the product may be applied or removed without disturbing connectors or fittings.

Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.