



Product Highlights

- Operating temperature from -60°C to +260°C (-76°F to +500°F)
- ASD EN 6049-009
- Fire protection of wire harnesses according to ISO 2685: 5 min at +1100°C (+2012°F)
- Excellent cut-through and abrasion resistance
- Halogen-free
- Self-wrapping design
- Ideal for reworking components without disconnecting them
- Water repellent

Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

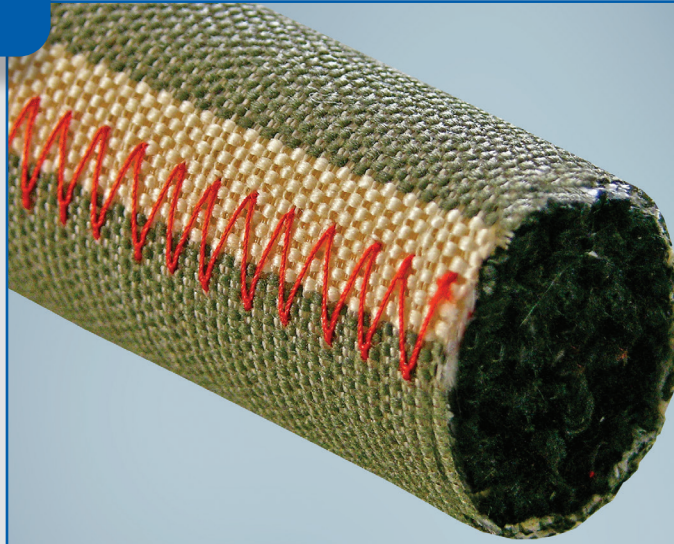

RT Tape



NT-40

ROUNDIT® Therm-A is a multi-layer thickwall wrappable sleeving with a water repellent treatment designed for thermal protection and maintenance of wire and cable bundles. Its 100% covering ratio provides excellent cut-through and abrasion resistance.

The construction of ROUNDIT Therm-A ensures an excellent fire protection for wire harnesses up to +1100°C (+2000°F) for 5 minutes according to ISO 2685 specification.

The self-wrapping design of ROUNDIT Therm-A allows for quick and easy installation and removal of the product for assembly and maintenance. This design also accommodates break-out areas and provides ease of removal when inspection or maintenance of cables is necessary. To secure break-out areas RT TAPE is available.

As an additional benefit, ROUNDIT Therm-A is available in a range of sizes to accommodate a variety of cables and wire diameters.

Closure of the product is secured with a fire resistant lacing tape NT-40 withstanding 5 min at +1100°C (+2000°F) in compliance with ISO 2685.